

Arco Mistral Safety Spectacles

Specification Sheet

Product Code: 3G2500, 3G2600, 3G2700**For further information:**

Arco Ltd, PO Box 21, Waverley Street, Hull, HU1 2SJ

www.arco.co.uk

Tel: 01482 222522 Fax: 01482 28536

GENERAL SPECIFICATIONS(mm)

Lens thickness: 2.3 mm

PD: 68 mm

Lens Base: 10 curve

Weight: 21 gm

Lens size vertical: 42.8 mm

Lens size diagonal: 135 mm


Bridge: 14.7 mm

Temple length (lens-tip): 158.4 mm

Overall Width (hinge-hinge): 125 mm

Closest point between lenses: 10 mm

Closest point between temple tips: 83±2 mm

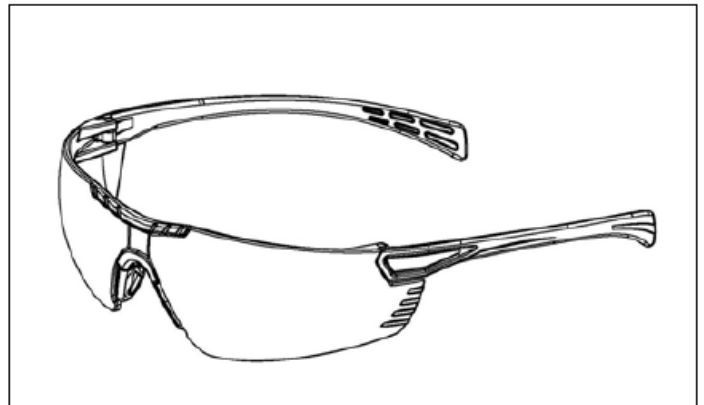

COMPONENT	MATERIAL	FEATURES
Lens	Polycarbonate	10 base curved, one-piece lens
Nose piece	PVC	Soft pad
Temple	Polycarbonate	Spatula
Hinge	Polycarbonate	3-Barrel Type
Screw	Stainless Steel	Standard Hinge Screw

SPECIAL FEATURES

- Full wraparound design and panoramic visual field
- Incredibly light, resilient and durable protective eyewear for all-day use
- Soft nose pads provide universal-fit and comfort
- Medium impact resistance (45 m/s)
- Lenses performance: anti-fog and anti-scratch
- UV absorption is built into the raw material to provide 99.9% of UV protection

APPROVAL	PACKING
● Ref : 3G2500 Clear Lens : 2C-1,2 arco 1F CE - Ref : 3G2600 Amber Lens : 2-1,2 arco 1F CE - Ref : 3G2700 Smoke Lens : 5-2,5 arco 1F CE ● CE EN166 approval : EN 166-F on the frame	12 pcs per box 120 pcs per carton

DATE : 21-April, 2014