



Technical data sheet

Corrugated board – EF 2.7 mm • 900 gsm

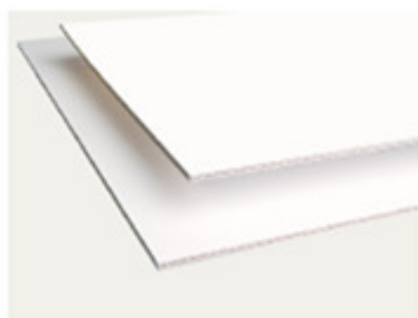

EF 2.7 mm (item 0211103)



Specifications:

Double corrugated board made of ageing-resistant material, natural white in colour. Flute thicknesses 1.6 and 1.1 mm, total thickness 2.7 mm.

Sizes ex-stock:

90 x 120 cm

Material characteristics:

Base paper

- 100% bleached cellulose
- without the usage of recycling fibres
- free of wooden fibres
- Kappa level 1 – 2 = lignin-free
- pH 7.5 - 10.0 = acid-free (in accordance with ISO 6588-1:2012)
- alkaline buffer > 2% natural calcium carbonate (GCC)
- sizing: neutral/synthetic (without alum additive)
- without optical brightening agents
- Photographic Activity Test (PAT) passed in accordance with ISO 18916:2007

Glue used for the corrugated board

- starch-based adhesive
- pH > 8.0

This quality corresponds to the technological basis of the following standards:

DIN EN ISO 9706

Information and documentation – Paper for documents – Requirements for permanence

DIN ISO 16245 - type A

Information and documentation – Boxes, file covers and other enclosures, made from cellulosic materials, for storage of paper and parchment documents.

NF Z 40-014

Prescriptions et critères de sélection des papiers et cartons pour la conservation des documents papiers et parchemins

ANSI/ NISO Z.39.48

American National Standard for Permanence of Paper for Publications and Documents in Libraries and Archives

DIN 6738:2007

Highest level of permanency LDK 24-85

Further information, such as our Quality Guarantee, certificates of independent testing institutions and information regarding application methods and instructions are stated on our website klug-conservation.com.