

ECOS MOULD OP158-24/CBNN

G9F08241

Technical data

| | |
|------------------------|-------------------|
| Product family: | Ecos |
| Bottom A: | 147 mm. +/- 1 mm. |
| Top B: | 157 mm. +/- 1 mm. |
| Rim C: | 162 mm. +/- 1 mm. |
| Rim D: | 166 mm. +/- 1 mm. |
| Height H: | 24 mm. +/- 1 mm. |
| Weight: | 8,3 gr. +/- 5% |



| | |
|------------------|---|
| Material: | Bleached pure cellulose light cardboard, inner side laminated with polyester film of 7 my, through monocomponent adhesive, printed both outside and inside. |
|------------------|---|

| | |
|---------------------|----------------|
| Tot. Gr/sqm: | 217 gr. +/- 5% |
|---------------------|----------------|

| | |
|------------------|------------------------------------|
| Printing: | Full surface printing (both sides) |
|------------------|------------------------------------|

| | |
|-------------|--|
| Ink: | Black resistant to alcohol (rubbing) and to heat (200°) Our inks and promoter are in conformity with the requirements stated by EUPIA |
|-------------|--|

| | |
|------------------|--|
| Adhesive: | Monocomponent adhesive used for laminating paper or cardboard. |
|------------------|--|


| | |
|------------------|---|
| Additive: | Water based varnish resistant to heat and humidity. |
|------------------|---|

| | |
|-------------------------|-------------|
| Heat resistance: | 180° ÷ 220° |
|-------------------------|-------------|

| | |
|----------------------------|---|
| Health Legislation: | Please refer to "Conformity declaration concerning paper and cardboard material to be in direct contact with foodstuffs". |
|----------------------------|---|

Packaging data:

| | |
|----------------------------|---|
| Box | mm. 545*365*370 |
| Volume | m3 0,074 |
| Quantity per box | 800 pcs. (200 pcs. * 4 row) |
| Pallet | EUR-PAL 80*120 |
| Lay-out | 4 boxes per 5 levels tot. 20 |
| Quantity per pallet | 16.000 pcs. |
| Label | with data for product identification |
| Protective film | Low density polyethylene used for packaging |

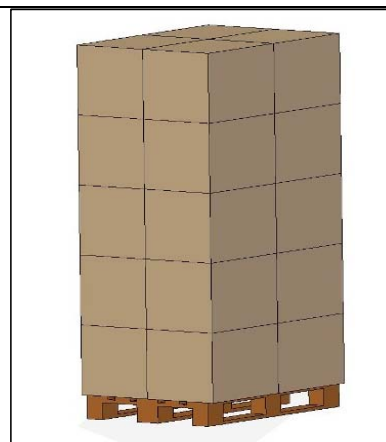

| Prepared | Approved | Date | Rev. | Modifications executed: |
|-----------------|----------|------------|------|-------------------------|
| | | 01/03/2009 | 2 | |
| QUALITY MANAGER | | | | |
| Ing. MEREGALLI | | | | |

Customer's approval


Stamp and signature:

Date:

PLEASE SEE OVERLEAF FOR TECHNICAL DRAWING

ECOS MOULD OP158-24/CBNN

G9F08241

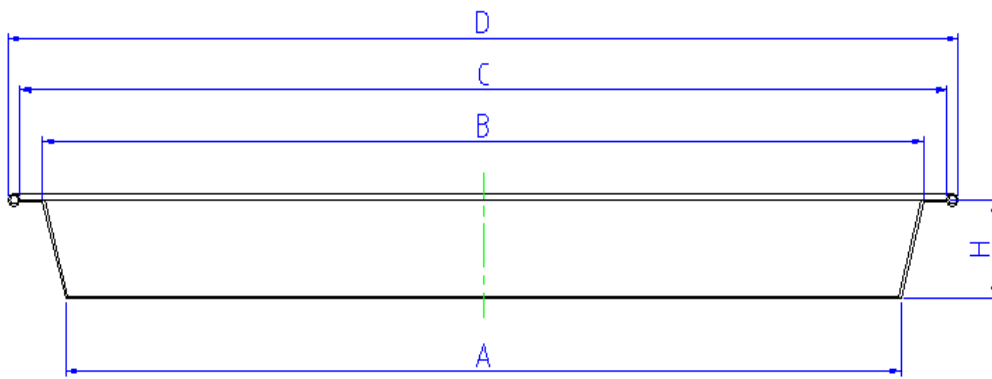

| Prepared | Approved | Date | Modification executed |
|-----------------------------------|----------|------------|-----------------------|
| | | 02/08/2010 | |
| QUALITY MANAGER Ing. MEREGALLI | | | |

Customer's approval

Stamp and signature:

Date:

INDUSTRIA CARTOTECNICA SPECIALIZZATA NELLA PRODUZIONE DI STAMPI DI CARTA

CARTA ONDULATA PER L'INDUSTRIA DOLCIARIA E ARTICOLI PER PASTICCERIA

Stabilimento e Uffici: 23846 GARBAGNATE MONASTERO (LC) – VIA EUROPA 1 – TEL. +39 031 858611 – FAX +39 031 851728

E-mail : info@novacart.com

Unità produttiva di Bosisio Parini: 23842 BOSISIO PARINI (LC) – LOC. PASCOLO – FAX +39 031 3581008

Internet : www.novacart.com

To whom it may concern

We hereby declare that our products are suitable for:

- conventional oven till a temperature of 180°-200°C (220°C if unprinted) for about 60 min.
- microwave oven
- freezing till a temperature of – 40° C

The above data are indicative.

It is responsibility of the user to ensure that the package is safe and adequate for the intended use.

Best regards

Date: 19/11/2014

Signature:

Claudia Bruseghini



Quality Resp.