


# NEGRO GTS TS05

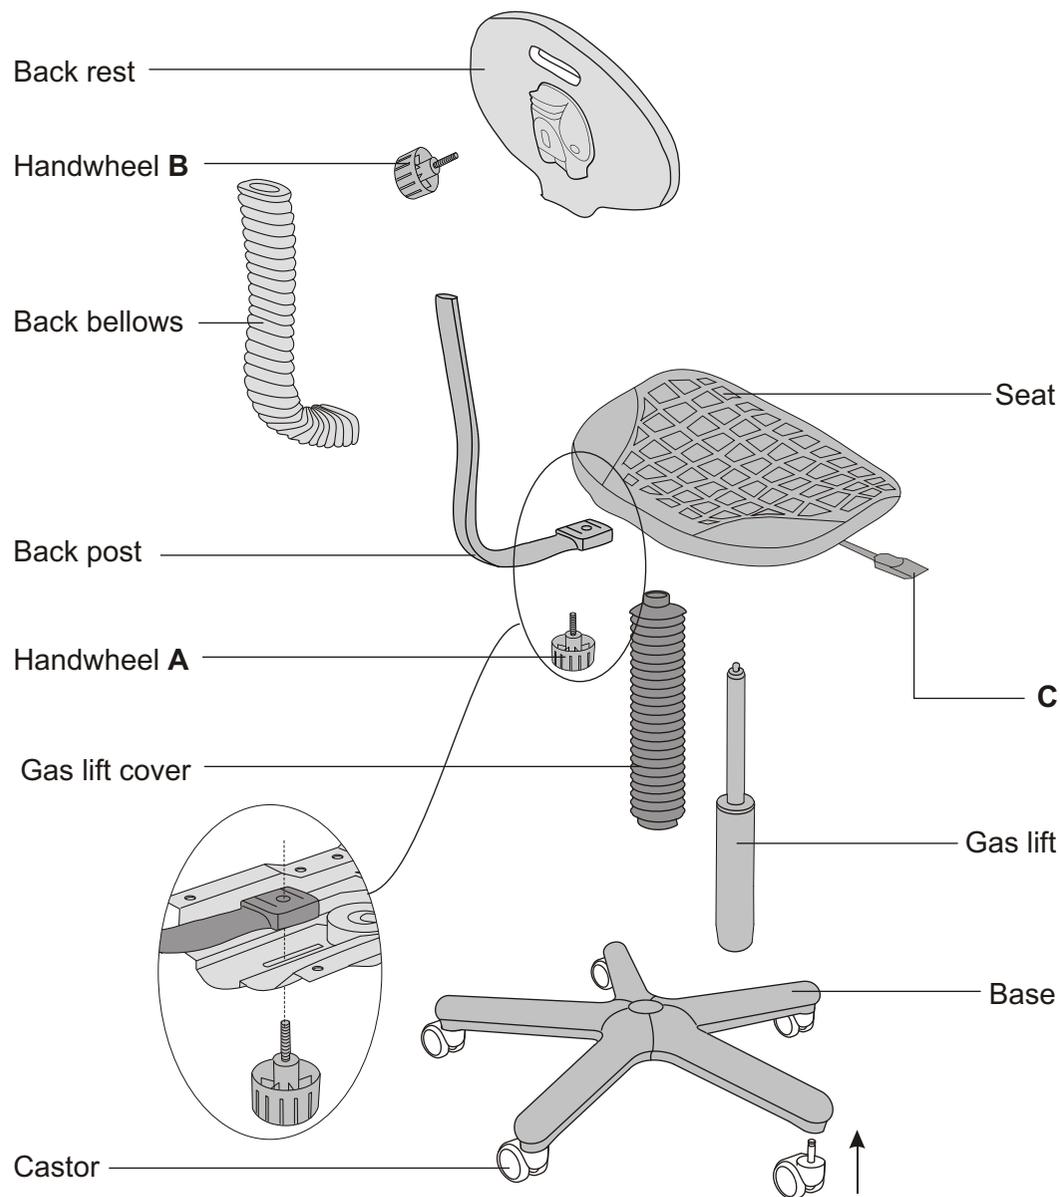

## ASSEMBLY AND ADJUSTMENT INSTRUCTIONS

Before beginning the assembly, check to see that all parts are enclosed.

### PART LIST

1 base	1 seat
5 castors	1 back post
1 gas lift	1 back bellows
1 gas lift cover	1 back rest
1 handwheel <b>A</b> (long)	1 handwheel <b>B</b> (short)

### ASSEMBLY

1. Insert castors into base.
2. Insert gas lift into base.
3. Pull gas lift cover over the gas lift.
4. Firmly locate the tapered end of the gas lift into locating hole in a seat.
5. Insert back post into seat hole and tighten handwheel **A**.
6. Slide back bellows over back post.
7. Put back rest upon the back post and tighten handwheel **B**.

### ADJUSTMENT

- The Seat height adjustment - lever **C**.  
Gas lift allows the adjustment of the seat height.
- The back height adjustment - handwheel **B**.  
By releasing handwheel **B** the back can be moved up and down. Place the back at desired position and retighten handwheel **B**.
- The back depth adjustment - handwheel **A**.  
By releasing handwheel **A** the back can be moved forward and back. Place the back at desired depth and retighten handwheel **A**.

### MAINTENANCE

**Inspection** Inspect chair at least every six months, to make sure all knobs, bolts and screws are tight.

**Upholstery** Wipe with damp cloth, moistened in a mild detergent solution. For unusual stains use commercial vinyl cleaner, following manufacturer's instructions.

**Fabric upholstery** Whisk or vacuum regularly. For unusual stains use commercial nylon cleaner, following manufacturer's instructions.

**Other surfaces** Wipe with a soft cloth, moistened in a mild detergent solution. Dry and buff lightly with a dry cloth.

#### Attention

Exchange and installation of gas-lifts should only be carried out by trained specialists.