

Arco Zenith Safety specs

Specification Sheet

Product Code: 3G0500

For further information:

Arco Ltd, PO Box 21, Waverley Street, Hull, HU1 2SJ

www.arco.co.uk

Tel: 01482 222522 Fax: 01482 28536

GENERAL SPECIFICATIONS(mm)

Lens thickness: 2.32 mm

PD: 68 mm

Lens Base: 9 curve

Weight: 28 gm

Lens size vertical: 45.5 mm

Lens size diagonal: 83 mm


Bridge: 14.3 mm

Temple length (lens-tip): 165 mm

Overall Width (hinge-hinge): 141 mm

Closest point between lens: 10 mm

Closest point between temple tips: 87 mm

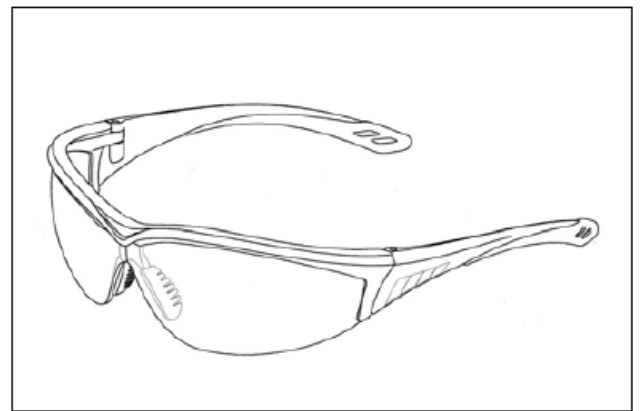

COMPONENT	MATERIAL	FEATURES
Lens	Polycarbonate	One piece molded lens, high curved for side protection
Frame	Polycarbonate	Semi-frame design
Side Shields	Polycarbonate	Integral to the lens
Nose piece	PVC	Snapped onto the nose bridge
Temple	Polycarbonate	Spatula
Hinge	Polycarbonate	3 Barrel type
Screw	Stainless Steel	Standard hinge screw

SPECIAL FEATURES

- Wrap around lens provides panoramic vision.
- Soft nose pad provides comfort for all-day use.
- Unique temple design of both matt and glossy surface after injected.
- Available with neck band for working environment with big movements.
- Anti-scratch coated lens as standard.
- 100% pure polycarbonate lens filters out more than 99.9% of harmful light.
- **CE certified to EN166, optical class 1 & low energy impact F**